

Small Self-Latching Type Solenoids

DL0512S2 Series

Features

- ◇ Miniaturized design for space saving (Dimensions 4.6x8.0x12.5mm).
- ◇ Self-Latching is available at zero power consumption by installing permanent magnet.



Applications

- ◇ CD-ROM, DVD-ROM

Products Line (at 20degree Celsius)

Actual size

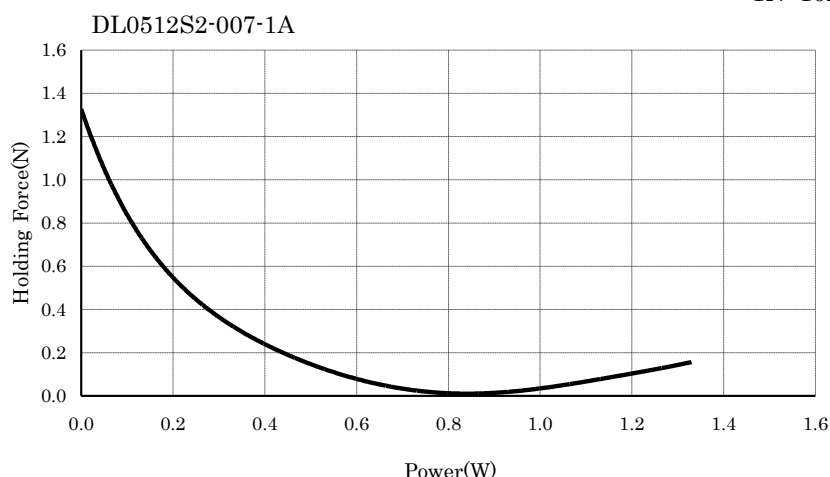
No	Products No.	Rated voltage	Coil Resistance	Rated duty	Holding force (initial)	Coil Temperature rise
1	DL0512S2-007-1A	3V DC	7.5 ohm	ON Time 0.1sec max. OFF Time 5sec min.	0.8N min. <0V DC> < Stroke 0mm> 0.4N min. <3V DC> <Stroke 0mm>	60deg C max. <3V DC> <ON Time 0.1sec OFF Time 5sec>
2	DL0512S2-026	5V DC	26 ohm	ON Time 1sec max. OFF Time 9sec min.	0.8Nmin. <0V DC> < Stroke 0mm> 0.05N min. <4.65V DC > <Stroke 0mm>	60deg C max. <5V DC> <ON Time 1sec OFF Time 9sec>

Typical Specifications

Item	Specifications
Insulation resistance	50 megohm min. 250V DC
Withstand voltage	250V AC for 1 min.
Insulation grade	JIS E class(except lead wire)
Operating life	10,000 cycles
Operation temperature range	-20 to +60 degree Celsius
Storage temperature range	-30 to +85 degree Celsius

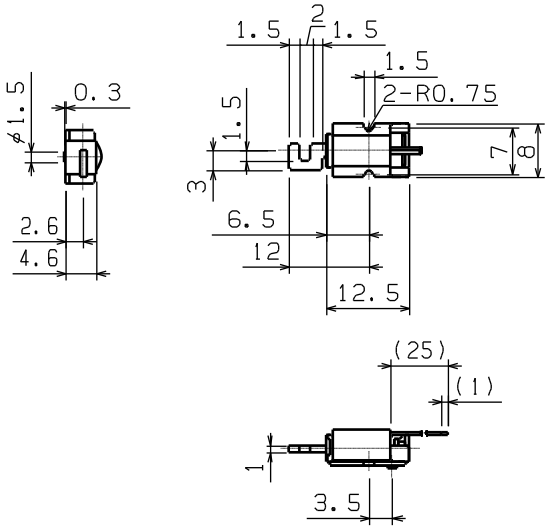
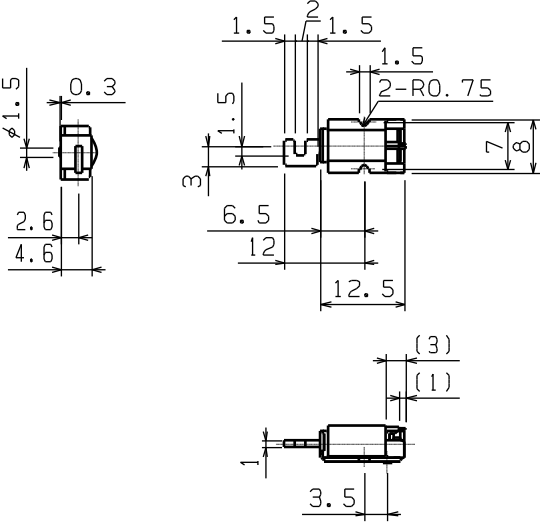
Holding Force (Typical value) <at 20 degree Celsius initial>

1N=102gf



□ Dimensions

Unit: mm

No	Style
1	<p>DL0512S2-007-1A</p>  <p>The dimensions at stroke 0mm</p>
2	<p>DL0512S2-026</p>  <p>The dimensions at stroke 0mm</p>

□ Notes

1. The appearance and specifications of the product may be modified without prior notice to improve its performance.
2. This catalogue shows only outline specifications. When using the product, please obtain formal specifications.
3. Please see appendix [How to select solenoid].
4. Please confirm the performance on actual operation by simulation with actual environments for high reliability.
5. Please avoid the storage in dusty environment. If you store the products for a long time, do not keep open the package.
6. Please take care for the usage in high humid atmosphere and design in to meet the operating condition of the devices, for the coil resistance increases 0.4%/degree Celsius depending on the operating ambient temperature.
7. Please feel free to contact us for the models with other coil resistances.