

# Push-type Detector Switches


## SW3AF-361 Series

### Features

- ◇ Superior reliability at micro-current by employing a sliding contact.
- ◇ High reliability gained by gold contact for environment.

### Applications


- ◇ Mechatronic detection for DAT units.



Actual size

### Products Number System

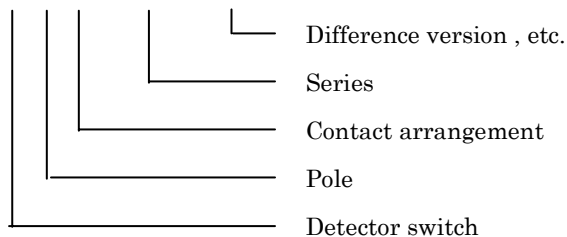SW 3 AF - [ ] [ ] [ ] - [ ] [ ]



### Products Line

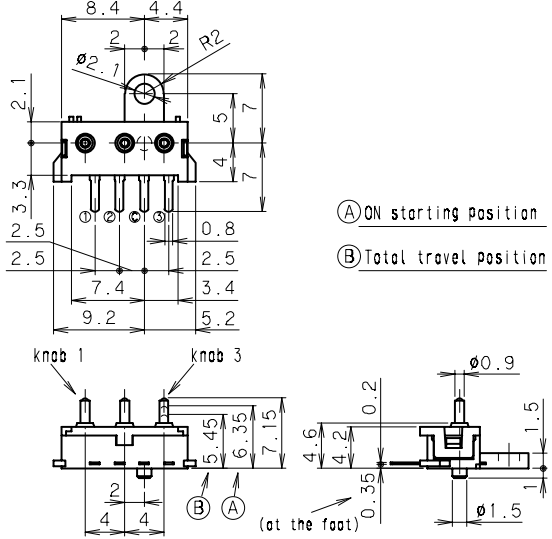
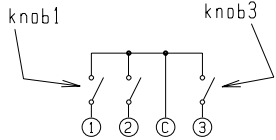
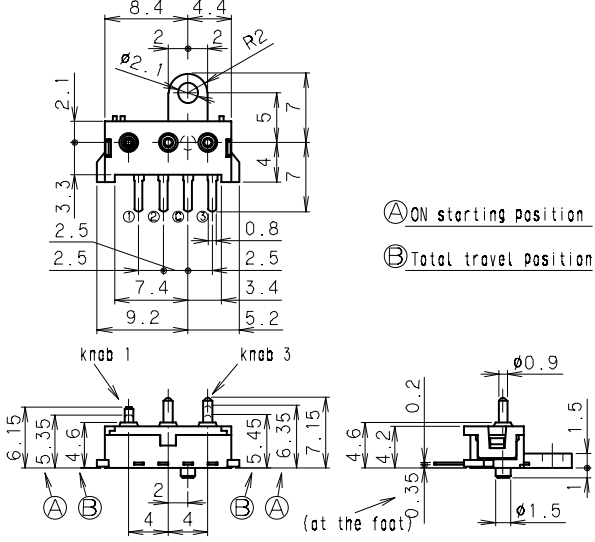
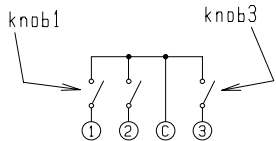
No	Products No	Pole	Position	Notes
1	SW3AF-361-14AU	3	1	
2	SW3AF-361-15AU	3	1	

### Typical Specifications

Item	Specification
Ratings (max.)	0.2 to 5mA 5V DC (Resistive load)
Contact resistance	1 ohm max.
Insulation resistance	100 megohm min. 100V DC
Withstanding voltage	100V AC for 1min.
Operating life with load	100,000 cycles
Operating force	0.30N max.

## Dimensions

Unit : mm

No	Style	Circuit diagram (TOP VIEW)
1	SW3AF-361-14AU 	
2	SW3AF-361-15AU 	

## Notes

- The appearance and specifications of the product may be modified to improve its performance without prior notice.
- This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- Please see appendix [Cautions in Using Switches].
- This switch is not washable.
- Soldering shall be done with actuator at free position and take care not to attach flux on plastic portion.
- Note that if the stress is applied to the terminals during soldering, they might cause deformation and defects in electrical performance.
- In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
- In case circuit and software design consideration against chattering and bouncing shall be taken as below.
  - Read a few times. (Ex. 5ms for 5 times)
  - Set delay time.
  - Set integral circuit.
- As to threshold voltage, center setting is recommended.
- Care shall be taken not to apply stress to the body of switch as it may affect the performance.
- Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.